



CBA Centrifugal Blowers are designed to provide efficient and reliable operation for commercial and extractive industry. Our products are manufactured with state of the art laser, forming, spinning and welding equipment and ensure our quality control testing to ensure trouble free start-up. Our CBA Centrifugal Blowers are including industry leading design features to ensure your ventilation equipment has the latest technologies available




### Main feature with CBA Centrifugal Blower

- Concentric mount bearings with industry's highest cataloged bearing life
- Full mold, full welded structure
- Co rrosion resistant, electrostatically applied and baked powder coatings
- Both belt and direct drive configurations
- Different motor brackets
- ISO9001:2000 controllable standard


### Typical application includes:



Every CBA Has Been Test For Three Different Planes Before Package.

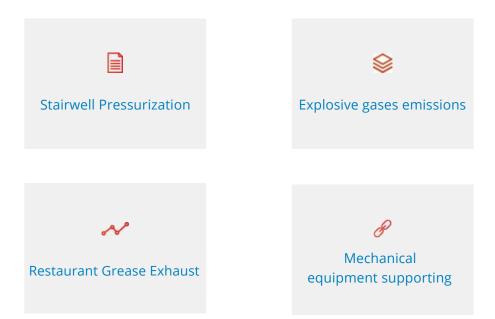

# Mixed Fan Model Number Code

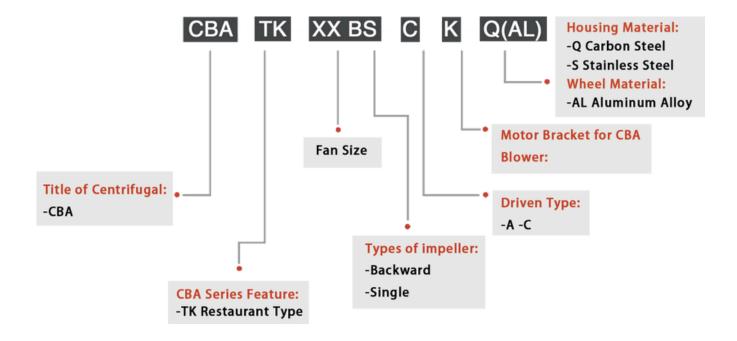

# CBA-TK Serie

Direct drive, carbon steel and stainless steel are available. L eading design product with large air volume and medium pressure








































CCW 315° [BAU]



# CBA-TK-08BS

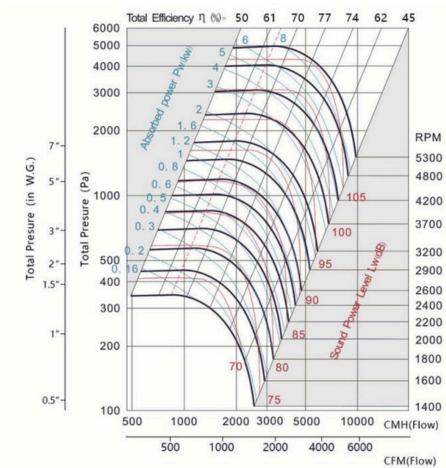


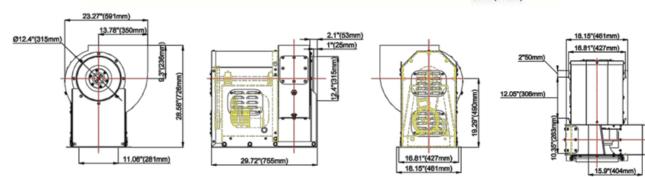


Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	0. 5HP	220V/60H	220V/60H	1400RPM
	0.5HP	Z	Z	1400KFW
	0.75HP	120V/60H	120V/60H	4000000
	0. 75HP	Z	Z	1800RPM
ODA TIZ OODO	1HP	220V/60H	220V/60H	000000014
CBA-TK-08BS	1HP	Z	Z	2200RPM
	1.5HP	120V/60H	120V/60H	
	1.5HP	Z	Z	2450RPM
	2HP	220V/60H	220V/60H	
	2HP	Z	Z	2800RPM
		120V/60H	120V/60H	
		Z	Z	

220V/60H 220V/60H Z 120V/60H 120V/60H

# CBA-TK-10BS

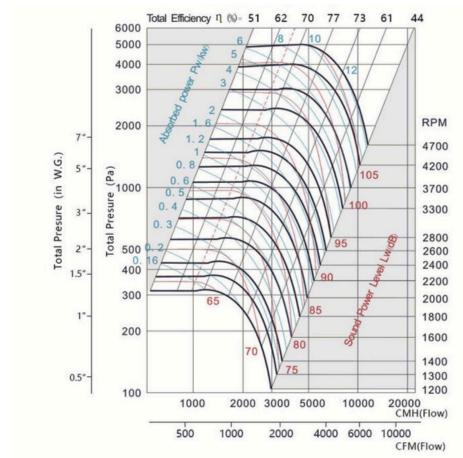

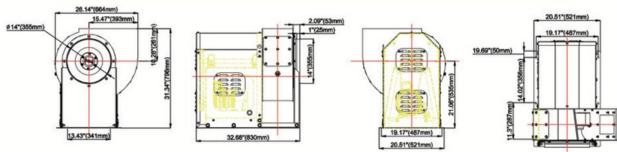

Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	0.75HP	220V/60Hz	380V/60H	1200DDM
	0.75HP	120V/60Hz	Z	1300RPM
	1HP	220V/60Hz	230V/60H	1500DDM
	1HP	120V/60Hz	Z	1500RPM
CDA TIZ 10DC	1.5HP	220V/60Hz	380V/60H	2000RPM
CBA-TK-10BS	1.5HP	120V/60Hz	Z	
	2HP	220V/60Hz	230V/60H	000000014
	2HP	120V/60Hz	Z	2300RPM
	3HP	None	380V/60H	000000014
	3HP	None	Z	2800RPM
			230V/60H	+
			Z	


380V/60H


230V/60H

Z

# CBA-TK-14BS



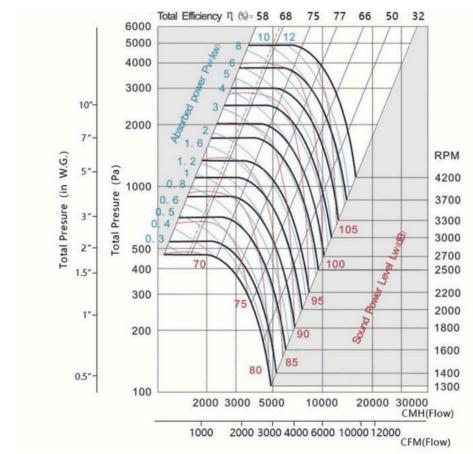


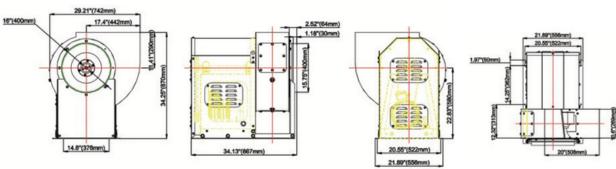


Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	0.75HP	220V/60H	380V/60H	1200DDM
	0.75HP	Z	Z	1200RPM
	1HP	120V/60H	230V/60H	4500DDM
	1HP	Z	Z	1500RPM
	1. 5HP	220V/60H	380V/60H	40500004
004 714 4400	1. 5HP	Z	Z	1650RPM
CBA-TK-14BS	2HP	120V/60H	230V/60H	10000001
	2HP	Z	Z	1800RPM
	3HP	220V/60H	380V/60H	
	3HP	Z	Z	2100RPM
	4HP	12 <b>0\969</b> H	230V/60H	
	4HP	Z	Z	2400RPM
		220V/60H	380V/60H	
		Z	Z	
		120V/60H	230V/60H	
		Z	Z	
			380V/60H	

Z

# CBA-TK-16BS

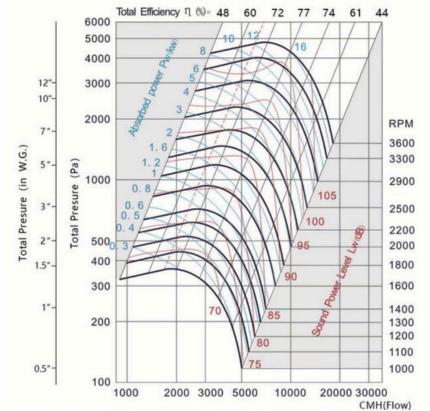

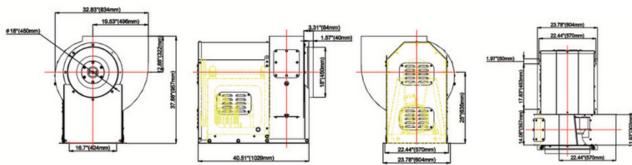


Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	0.75HP	220V/60H	380V/60H	900RPM
	0.75HP	Z	Z	900KFW
	1HP	120V/60H	230V/60H	4400000
	1HP	Z	Z	1100RPM
	1.5HP	220V/60H	380V/60H	400000014
	1.5HP	Z	Z	1300RPM
	2HP	120V/60H	230V/60H	1450RPM
CBA-TK-16BS	2HP	Z	Z	
	3HP	220V/60H	380V/60H	
	3HP	Z	Z	1700RPM
	4HP	120V/60H	230V/60H	
	4HP	z None	Z	1850RPM
	5.5HP	220V/60H	380V/60H	
	5.5HP	Z	Z	2000RPM
		120V/60H	230V/60H	20001 W
		Z	z 380V/60H	


230V/60H

380V/60H



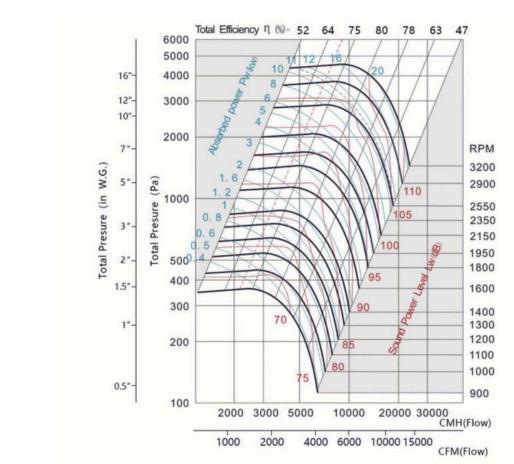

CBA-TK-18BS

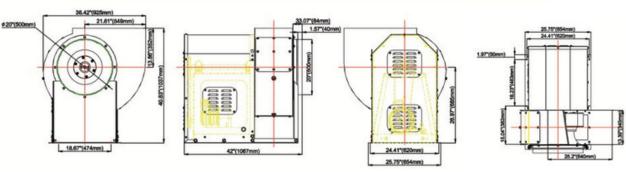

Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	1HP	220V/60H	380V/60H	900RPM
	1HP	Z	Z	SUURPINI
	1.5HP	120V/60H	230V/60H	1100RPM
CBA-TK-18BS	1.5HP	Z	Z	TIOURFIN
	2HP	220V/60H	380V/60H	1300RPM
	2HP	Z	Z	1300RPW
	3HP	120V/60H	230V/60H	1500RPM
	3HP	Z	Z	ISOURPIVI
	4HP	220\%66H	380V/60H	1650RPM
	4HP	Z	Z	IOSURPIVI
		120V/60H	230V/60H	-
		_	_	


z 380\


380V/60H z

230V/60H

Z

# **CBA-TK-20BS**

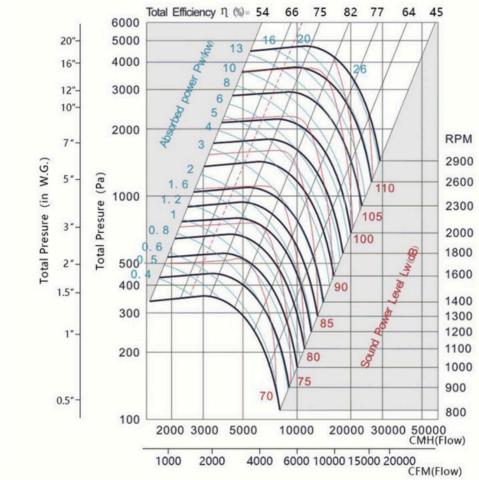

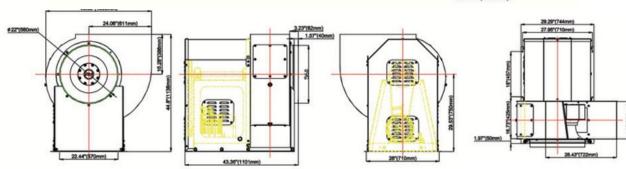


Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	1.5HP	220V/60H	380V/60H	OFODDM
	1.5HP	Z	Z	950RPM
	2HP	120V/60H	230V/60H	4050DDM
	2HP	Z	Z	1050RPM
ODA TK OODO	3HP	220V/60H	380V/60H	4450DDM
CBA-TK-20BS	3HP	Z	Z	1150RPM
	4HP	120V/60H	230V/60H	10000001
	4HP	<sub>Z</sub> None	Z	1300RPM
	5.5HP		380V/60H	
	5.5HP		Z	1450RPM
			230V/60H	
			Z	


380V/60H


230V/60H

# CBA-TK-24BS



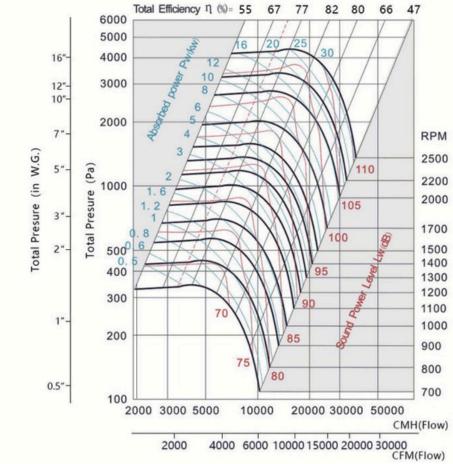

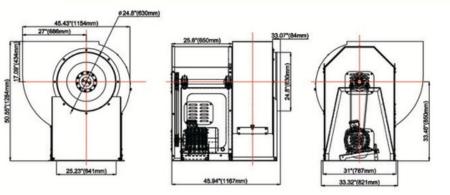




Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	2HP	220V/60H	380V/60H	800RPM
	2HP	Z	Z	OUURPIVI
	3HP	120V/60H	230V/60H	0000001
CDA TK DADC	3HP	Z	Z	900RPM
CBA-TK-24BS	4HP	None	380V/60H	4000000
	4HP		Z	1000RPM
	5.5HP		230V/60H	400000014
	5.5HP		Z	1200RPM
			380V/60H	

z 230V/60H z 380V/60H

# CBA-TK-28BS

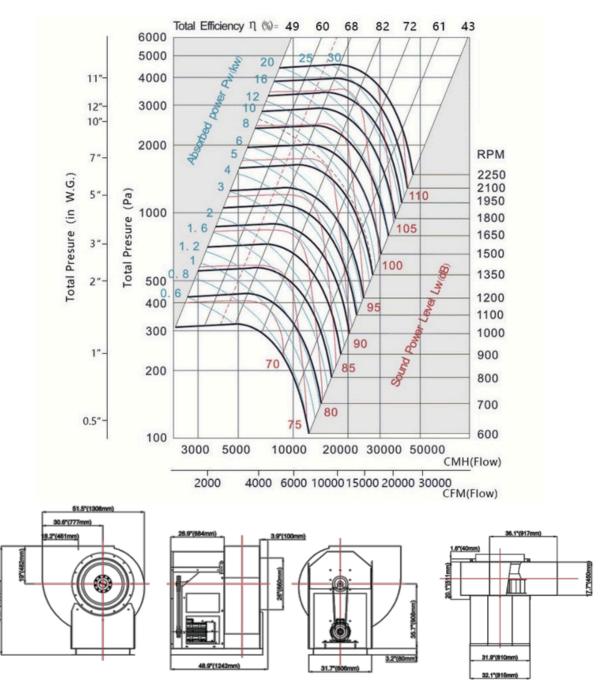



Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	3HP		380V/60H	800RPM
	3HP		Z	600RPIVI
	4HP	None	230V/60H	0000001
CDA TK 20DC	4HP		Z	900RPM
CBA-TK-28BS	5.5HP		380V/60H	4000000
	5.5HP		Z	1000RPM
	7.5HP		230V/60H	44000004
	7.5HP		Z	1100RPM
	1		380V/60H	-
			Z	
			230V/60H	
			7	

380V/60H

# CBA-TK-32BS




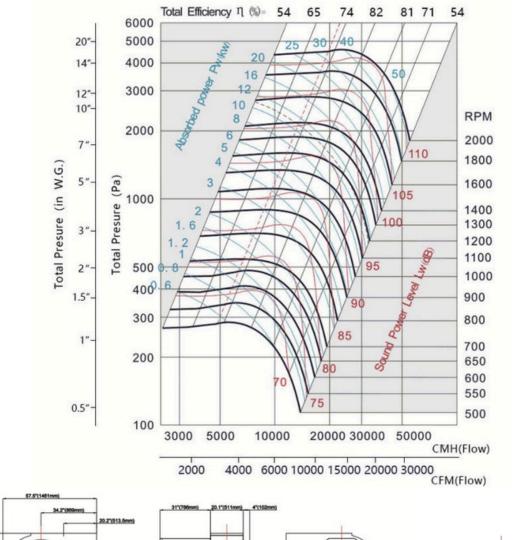


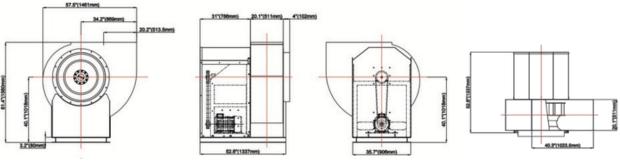

Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	5.5HP	ĺ	380V/60H	700RPM
	5.5HP		Z	TOURTIN
CDA TIZ 22DC	7. 5HP	None	230V/60H	OFODDIA.
CBA-TK-32BS	7.5HP	None	Z	850RPM
	10HP		380V/60H	400000014
	10HP		Z	1000RPM
			230V/60H	
			Z	
			380V/60H	
			Z	
			230V/60H	
			7	

### CBA-TK-36BS

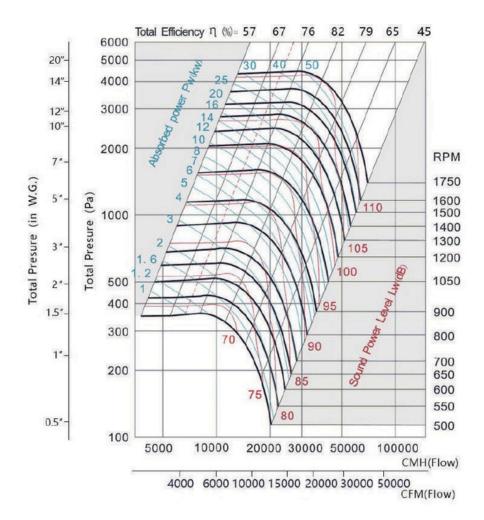

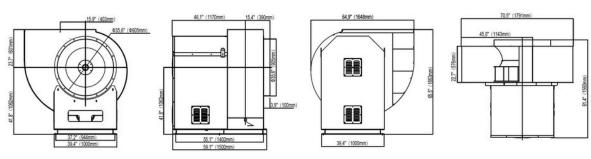

Model	Power	AC motor 1Ø	AC motor 3Ø	Fan Speed
	10HP		380V/60H	OODDM
	10HP		Z	800RPM
CBA-TK-36BS	15HP	None	230V/60H	1000RPM 1200RPM
	15HP		Z	
	20HP		380V/60H	
	20HP		Z	
			230V/60H	
			Z	
			380V/60H	
			Z	
			230V/60H	

### Usage Description

- 1. The Fan Is Mainly Use In Delivering The Clean Air Without The Place That With Easy Burning Materials, Explosive Materials And Powder
- 2.If The Fan Is Fed With External Rotor Machine And Sealed Ball Bearing. It Is Free Maintenance.
- 3.If The Fan Install In The Damping And Sobering Area, Continuous Operation Is Required For The Fan.
- 4.The Fan Can Be Installed In The Outdoor Or Damp Environment With Drainage System.
- 5.All The Fans Are Feeding With International Standard Motors, Which Are Single Phase 120V, 60Hz Or 220V,50Hz And Three Phases 380V, 50Hz6.Installation Is Available In Any Areas

#### Installation

- 1.Must Be Install According To The Air Flow Marking2.Must Be Connect To The Piping Or Equip With SafetyAccessories
- 3.Must Be Installing In A Proper Way And Make Sure The Outlet Is Without Any Unusual Materials.
- 4.Try To Installing The Fan As Easy As For The Maintenance Purpose
- 5.Fan Required Flanges In Order To Avoid The Piping Damage When Vibrated
- 6.Speed Controller Or Transformer Is Available To Connect To The Fan
- 7. Wiring Diagram Is In The Package.
- 8. Wiring Must Be Strictly Following The Wiring Diagram.
  9. Electrical Installation Must Be Done By Professional Technicians.
- 10.Electrical Installation Must Be Connecting In The Special Control Box.

#### Maintenance



2. When Disassemble The Larger Fan, Please Care For The Weight To Avoid Blocking And Scratching

- 3. Cleaning The Fan Once A Year, So That It Can Keep The Function And Avoid The Unnecessary Damage.
- 4.Ball Bearing Is Free Maintenance Except For The Necessary Updates.
- 5.When Cleaning The Fan, Please Do Not Use The High Pressure Washer Or Strong Solvent, And Do Not Take Out The Damaging Impeller
- 6.Make Sure The Fan Is Operating Without Any Noise

### Failure Detection

1.Make Sure The Fan Is In The Load Condition. 2.Verify The Impeller Is Without Block. 3.Please Do Check With The Heat-variable Switch And Motor Protector. If The Switch Is Not In Connected, Please Do Check It. If Its Need To Restart Makes Sure The Power Supply Is Cut Off In A Few Minutes Until The Rated Current Is Not Higher Than 1.6A. If The Motor Has The Heat Protector, It Will Automatically Reset After Cool Down. 4.Make Sure The Capacitor Is Connected According To The Wiring Diagram. 5.Please Change The Capacitor At The First Time When The Fan Is Not Work. 6.Please Contact The Distributor If The Fan Is Still Not Work 7.When Send Back The Fan To The Distributor, Please Clean It And Make Sure The Cables Are

### Operation

Before Operation, Please Make Sure

- 1.The Real Maximum Current Cannot Be Exceed The National Standard Index:+5%.
- 2.The Voltage Pulsation Is Between +6% --+10%
- 3.No Exceptional Noise Produce When Operation.
- 4. The Rotating Direction For Three Phase Motor Is The Same As The Marking.

#### Guarantee

The Guarantee Is Valid Only With The Guideline Of This Manual.

Noise Level Test Method

1m/45° Free Zone, Without Connect The Ducting Noise Data